



**JACOBSEN  
BRINGS YOU**  
**Aspecta**

## Aspecta One, Luxury Vinyl Tile Residential & Commercial


Suitable for all residential and commercial applications such as:

- > Healthcare
- > Retail
- > Education
- > House
- > Workplace
- > Cafe
- > Restaurant

### Technical Data

Characteristic	Standard	
Construction	Solid Vinyl Tile	
Surface Treatment	Urethane coating with ceramic bead particles	
Overall Thickness	EN ISO 24346	2.5mm
Wear Layer Thickness	EN ISO 24340	0.70mm
Residual Indentation	EN ISO 24343-1	Pass
Dimensional Stability	EN ISO 23999	Pass
Colour Fastness to Light	ATSM F1515	Pass
Castor Chair Test	EN ISO 4918	No Change
Critical Radiant Flux	EN ISO 9239-1	7.4 kW/m <sup>2</sup>
Chemical Resistance	No Change	
Slip Resistance	Dependent on surface finish. Refer to website.	
Environmental	Phthalate Free Low VOC Declare - SVHC Free	


### 1222 x 200mm

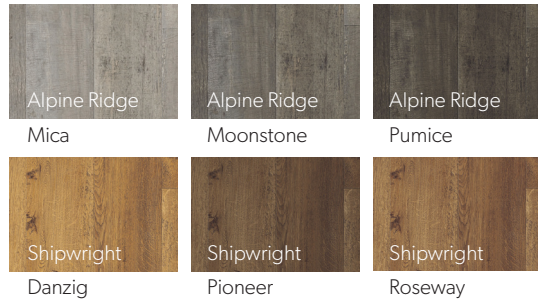

### 1524 x 228.6mm




### 609.6 x 101.6mm Mini Plank

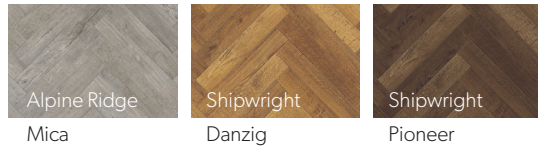

### 609.6 x 609.6mm



### 914.4 x 457.2mm

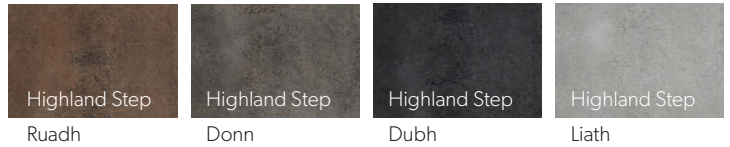

### Size & Packaging / Slip Resistance Value

	Size (mm)	Tiles Per Pack	m <sup>2</sup> Per Pack	SRV
Shipwright/ Alpine Ridge	1222 x 200	12	2.93	38 41
Loftwood/ Coventry Dockside	1524x228.6	10	3.48	38 41 38
Mini Plank	609.6 x 101.6	36	2.23	*
Midtown	609.6 x 609.6	9	3.34	41
Highland step	914.4 x 457.2	8	3.34	37

\*Same as Alpine Ridge and Shipwright 1222mm x 200mm size

### Benefits

- Declare - SVHC free.
- Mini plank available for additional design work such as herringbone, chevron, basketweave.
- Four-sided micro bevel.
- Glue down installation.
- Extra heavy duty wear layer.
- Can be installed in kitchens and bathrooms.

**Jacobsen**® | 

Talk to one of our experts, or visit our website:

0800 800 460 | [customer.services@jacobsen.co.nz](mailto:customer.services@jacobsen.co.nz) | [jacobsen.co.nz](http://jacobsen.co.nz)

