


Specifications


Construction	Multi-level Pattern loop
Fibre	Eco Solution Q™ Nylon
Dye Method	100% Solution Dyed
Pattern Repeat	None
Tufted Weight	26oz
Gauge	1/10"
Finished Pile Thickness	3.73mm
Total Thickness	7.75mm
Product Size	457.2mm x 914.4mm
Secondary Backing	Ecoworx™ tile
Protective Treatments	SSP® Shaw Soil Protection
ISO 9239.1: 2003 Fire Test	Mean Critical Radiant Flux 5.2kW/m²
Electrostatic Propensity	Less than 3.5 kv
Warranty	Lifetime Commercial Limited
Environmental	Good Environmental Choice Australia Cradle to Cradle Silver Certified Declare Label - LBC Compliant
Recyclability	100% recyclable
Materials	Does not contain PVC, Phthalates, or PBD/PBDE
Recycled Content:	
- Total Recycled Content by Weight	42%
- Pre-consumer	-
- Post-consumer	42%
Installation Options	
monolithic	basketweave
herringbone	ashlar
brick	stagger



Seek Earth

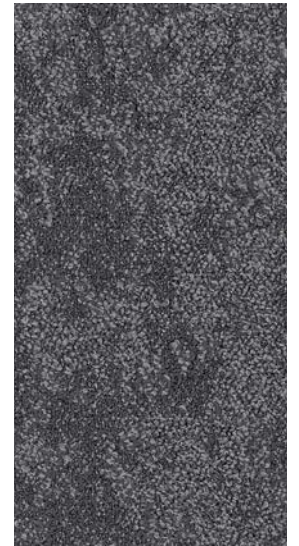

Seek Ridge

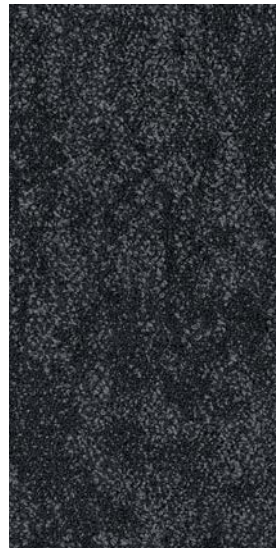

Seek Summit



Seek Vast

